



Custom Made Reach-In Door Options

All corners precision welded with no open surfaces for dirt and bacteria.



All stainless steel reach-in doors are custom made to your exact requirements—see options below.



Infit doors are made with an extra thick 1 1/2 or 2 inch interior panel and a 1 inch thick door face.



Overlap Door (Slab-Type)



Overlap / Slab type doors are offered in 3 thickness's: 2", 1 1/2", 1" (1 inch for non-refrigerated application)



Pivot style hinge available with spring closer. Pivot style hinge option, add \$25.00 (net) + hardware.



All custom made doors include door gaskets, magnetic or compression style, without additional charge.




We mount your door hardware in exact location you specify. Slotted holes allow for ease of adjustment.




We build your door with edgemount (shown), facemount, or pivot style hardware—hardware extra.




Facemount style hinge.

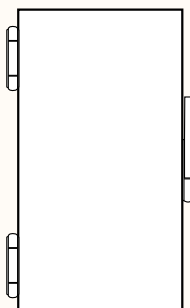


Left hand door with edgemount hardware. Requires compression style door gaskets.



Left hand door with pivot style hinges – door is shown with pull handle indicating the use of a magnetic door gasket.

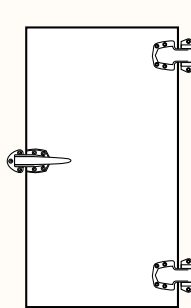

Right hand door with facemount hardware. Requires compression style door gasket.

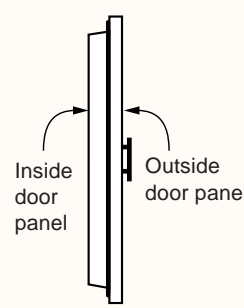

Infit style reach-in door with full insulation.



Reach-in slab style door. 1, 1 1/2", and 2 inches thick.

Estimating Door Size and Cost



Catalog prices listed at rear of catalog are customer list prices based upon size and door style.
Dealers and contractors, check your discount.

How to Measure Door Size

Follow steps below to find the order number of the door below.

Step 1



Measure width across door face.

Step 2



Measure height of door face.

Reach-In Doors Made To Order

Door Size (See above)	Overlap / Slab Type Doors * Order No.	Infit Type Doors ** Order No.
25 in. to 28 in.	92-100	92-300
29 in. to 32 in.	92-102	92-302
33 in. to 36 in.	92-104	92-304
37 in. to 40 in.	92-106	92-306
41 in. to 44 in.	92-108	92-308
45 in. to 48 in.	92-110	92-310
49 in. to 52 in.	92-112	92-312
53 in. to 56 in.	92-114	92-314
57 in. to 60 in.	92-116	92-316
61 in. to 64 in.	92-118	92-318
65 in. to 68 in.	92-120	92-320
69 in. to 72 in.	92-122	92-322
73 in. to 76 in.	92-124	92-324
77 in. to 80 in.	92-126	92-326
81 in. to 84 in.	92-128	92-328
85 in. to 88 in.	92-130	92-330
89 in. to 92 in.	92-132	92-332
93 in. to 96 in.	92-134	92-334
97 in. to 100 in.	92-136	92-336

All prices include door gasket, hardware optional.
* Overlap / Slab doors available in 1", 1 1/2", or 2" door thickness.
** Infit doors available in 2 1/2" or 3" door thickness.

Note: 4% additional discount does not apply to this product.

Step 3

Using width and height measurement from steps 1 and 2 above, add these two measurements as shown below for a total. This number may then be used to select from the left hand column of the door order chart.

EXAMPLE:

$$\begin{array}{r}
 \text{Door width: } 22'' \\
 \text{Door Height: } 44 \frac{1}{2}'' \\
 \hline
 \text{Total} = 66 \frac{1}{2}'' = 67 \text{ inches}
 \end{array}$$

* Round off all fractions to the next highest number.

Step 4

Select order number based on size and style of door desired. Check price schedule at rear of catalog for customer list cost. To confirm dealer cost, please call toll free number below.

Shipping:

All doors include crating. Half size doors in small quantities may be shipped UPS. Full sized reach-in doors must be shipped truck freight FOB Sun Valley, California.

Sales Department :
24 hr. Fax:
www.rhsc.net

Colorado (800) 716-7788
Colo. Fax (800) 835-6655
sales@rhsc.net

California (800) 537-8300
Calif. Fax (800) 833-3515
rhsupply@qwest.net



Reach-In Door Order Form

Please photocopy this form and fax or mail to us.

Firm Name: _____

Ship to: (If Different)

Street Address: _____

Name: _____

City: _____

Street Address: _____

State: _____ Zip: _____

City: _____

Phone No. () _____ - _____

State: _____ Zip: _____

Fax No. () _____ - _____

Attention to: _____

Is the above a residence? Yes No

Use this form to order a Reach-in door only. Refer to drawings on page 183, and fill in all blanks.

Specify type of Installation Replacing existing door New Installation

Which side of the door will the hinges be mounted on? (Facing door from outside) Left Right

Specify type of Reach-in Door (see middle pg. 183): Infitting Type Overlap Slab Type

Measurements of door face width & height (see top pg. 183) C= _____ x D= _____

Measurements of net door opening size (see top pg. 183) A= _____ x B= _____

Measurements of offset (see middle pg. 183) Door & Gasket F= _____

Measurement of door panel depth, door thickness (see middle pg. 183) E = _____

Specify hardware to be used (see middle right pg. 180): Edgemount Facemount Pivot

* Specify hardware (current or desired) Latch or Handle Part # _____ see catalog

Hinges, Qty: _____ Part # _____ see catalog

* Not required for a new installation—we will select if left blank. Hardware not included, must be purchased separately.

Select door gasket style, included with door: Non-Magnetic (Compression Type) Magnetic

Number of doors to be manufactured with above description. _____

Shipping: Doors normally include crating, and are shipped F.O.B. Sun Valley or Grand Junction. Freight charges are additional and will be payable to the delivering carrier. Small doors may be shipped UPS.

Deposit: A deposit of 50% of the purchase price may be required with your door order. Contact your RHS sales representative for details.



I have checked the above information and wish to place this order as shown.

Signed: _____ Title: _____ Date: _____


Photo Copy This Form and Return

Custom made Reach-in Door Work Sheet (Transfer all answers to order form, page 182)

1. Specify infitting or slab type door, _____ see below.
2. Indicate clear net opening size A _____ and B _____.
3. Specify outer door face size C _____ and D _____.
4. Specify total door thickness E, _____ door offset F _____.
5. Specify left or right hand door (which side are hinges mounted?) _____.
6. Specify hardware, edgemount or facemount or pivot style. (See catalog)

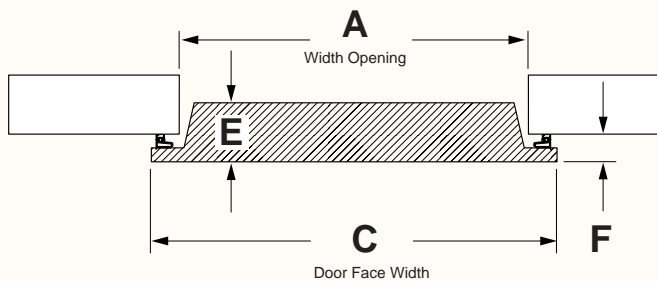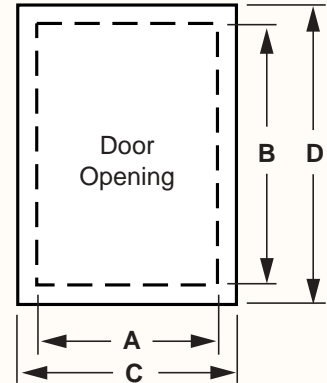

Infitting Type Door

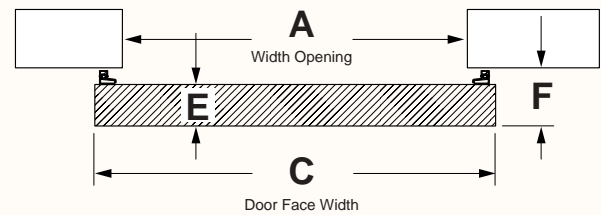


Overlap / Slab Type Door

How to measure for replacement door hardware.

Your replacement door includes predrilled slotted and adjustable holes for mounting hardware. To insure accurate placement of these holes you must specify exact measurement of hole location for both door handle and hinges.

Please include these measurements when ordering replacement doors. (Not required for new installations)

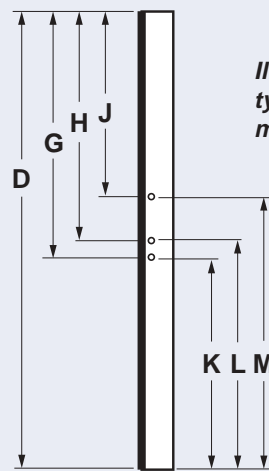


Edgemount Handle Location

Please measure top down and bottom up as shown.

Illustration shows typical door edge mounting hole location.

IMPORTANT:
Always measure from door edge to exact center of hole.

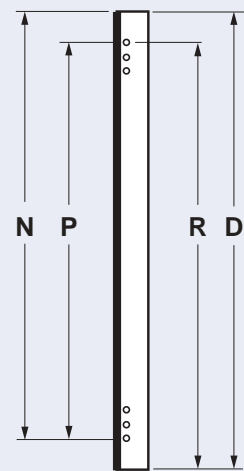

Hinge Hole Locations

Please measure top down and bottom up as shown.